



[FAQ] Steps to access the setting page of EDIMAX Access Point

Updated: Jul.16.2020
Document type: Product Configuration


Introduction

This FAQ is applied to all Edimax AP products.

The instructions below will guide you on how to access the setting page of Edimax AP.


Topology

An **Edimax AP** connects to an existing router via an Ethernet cable and provides 2.4GHz and/or 5GHz wireless network access for your mobile devices.

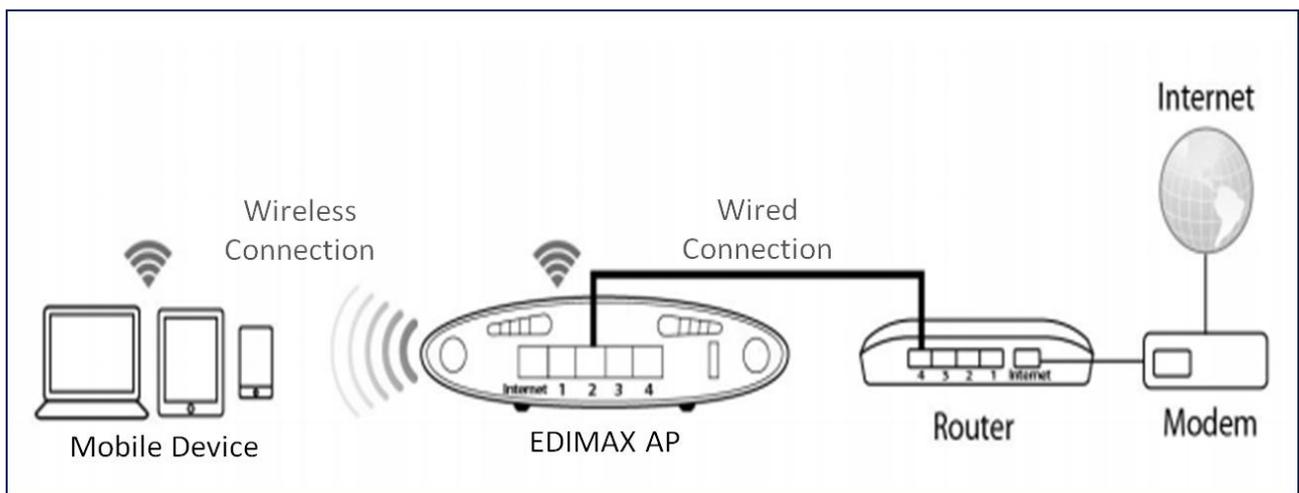


A. Before configure your Edimax AP

1. Plug the included power adapter into the Edimax AP's DC power port and the other end into a power socket. **(Please note that only use the included adapter to power up the device.)**
2. Please refer to the instructions and illustration below to connect your Edimax AP and computer to your router.
 - 2-a. Using an Ethernet cable, connect a LAN port on your Edimax AP to one of the LAN ports on your router.
 - 2-b. Using another Ethernet cable, connect the LAN port on your computer to one of the LAN ports on your router.

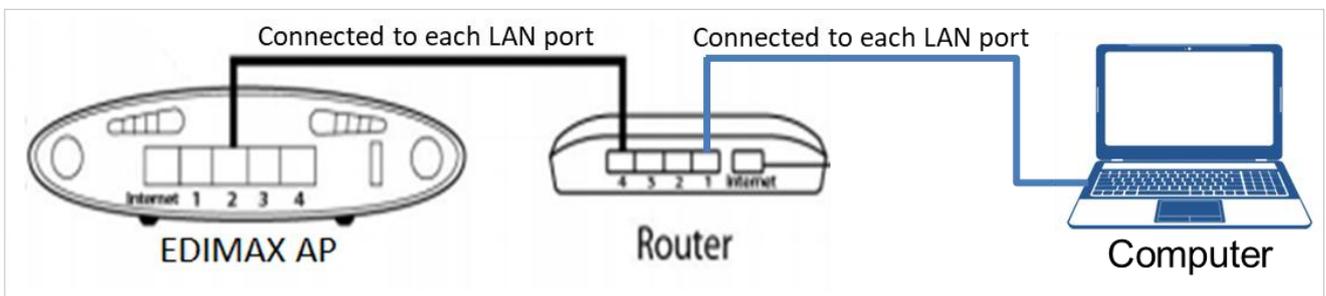


Note: Depending on the Edimax AP product you purchase as shown below, the LAN port is usually on the back of the device.

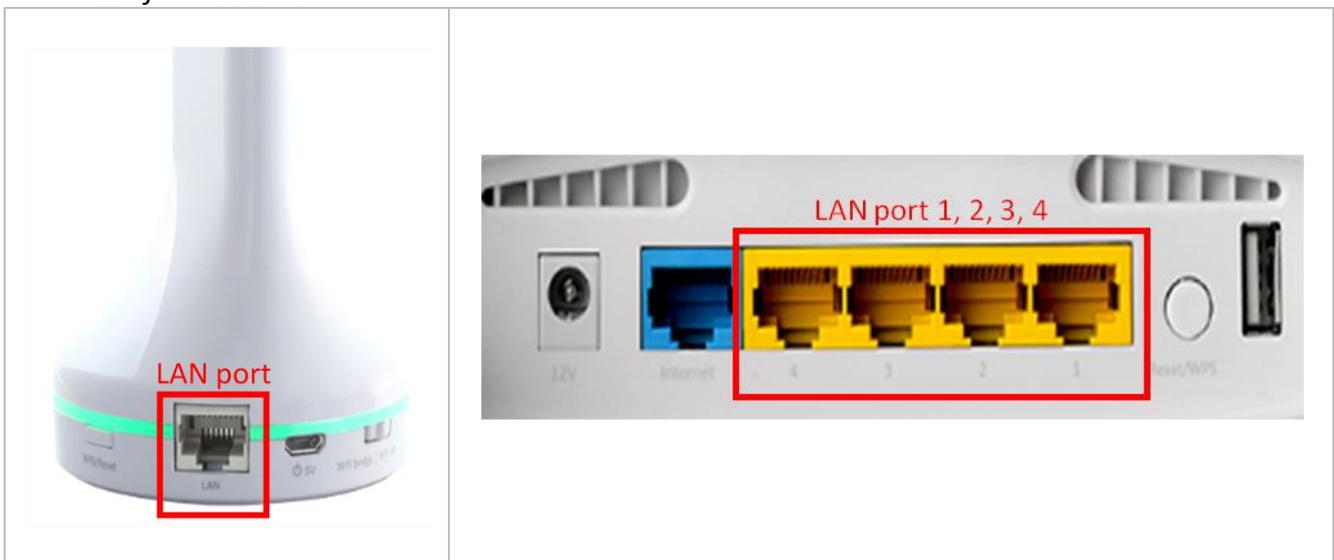


B. Access the setting page of your router to know your Edimax AP's IP


1. Take down the MAC address on the bottom side of your Edimax AP.

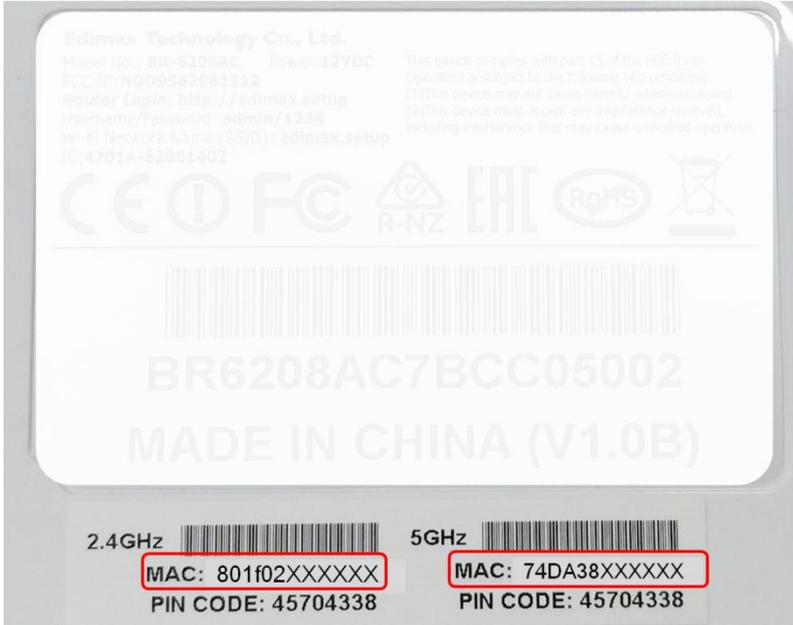

2. Open your web browser and access the setting page of your router to know the IP that is assigned to your Edimax AP. (e.g., Edimax Router's setting page, <http://edimax.setup> or <http://192.168.2.1>)

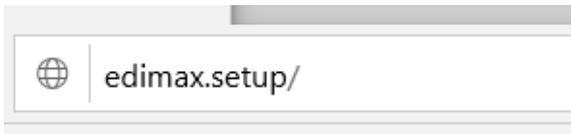

3. When your router prompts you for a username and a password, enter both of them that you set for it. Then, click **OK** to access the setting page. (e.g., Edimax Router's username: **admin**; password: **1234**)

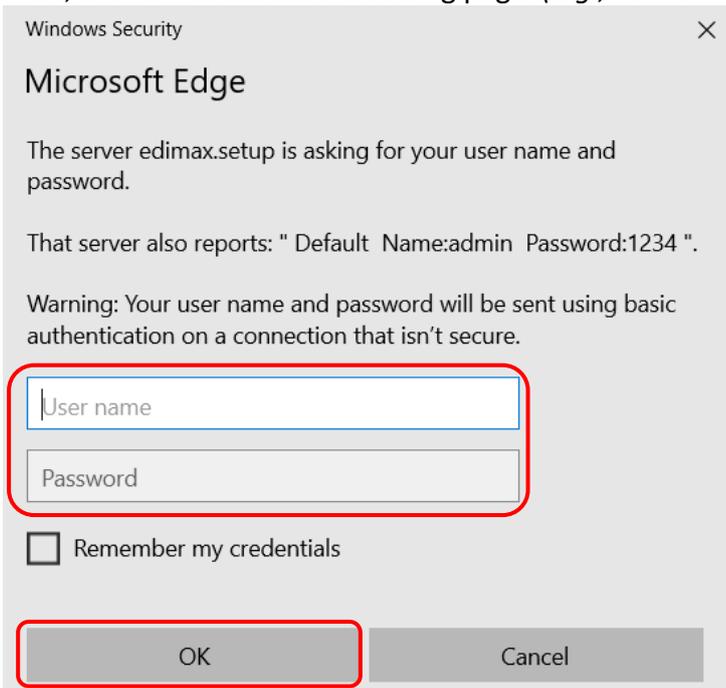

4. On the setting page of your router, check the IP assigned to your Edimax AP. Here we take an Edimax Router as our example. Click **Administration** on the menu to the left of the page. (e.g., Edimax Router's setting page, <http://edimax.setup>)

The screenshot shows the Edimax Wi-Fi Router Administration interface. The left sidebar menu has 'Administration' highlighted with a red box. The main content area displays 'System Status' with the following information:

System		LAN	
Model	Wireless Router	IP Address	192.168.2.1
Current Time	2019/8/1 14:32:51	Subnet Mask	255.255.255.0
Hardware Version	Rev. A	DHCP Server	Enable
Firmware Version	1.16	MAC Address	74:de:38:XX:XX:XX

Below the System Status section, there are two more tables:

Internet		2.4GHz Wireless	
IP Address Mode	Dynamic IP Disconnect	Mode	Access Point
IP Address		SSID	edimax_2.4G_E596A0
Subnet Mask		Channel Number	3
Default Gateway Address		Security	WPA2 (AES)
MAC Address	74:DA:38:XX:XX:XX	MAC Address	74:de:38:XX:XX:XX

5. Click **Active DHCP Client**. Find the **MAC address** on the page which you just took down from your Edimax AP (please refer to the **part B, point 1**) and take down the **IP address** assigned to the MAC address this time. Now you have your Edimax AP's IP address. (e.g., Edimax AP's IP address: 192.168.2.100; MAC address: 80:1f:02:XX:XX:XX)


The screenshot shows the Edimax Wi-Fi Router Administration interface. The left sidebar menu has 'Administration' expanded, and 'Active DHCP Client' is highlighted with a red box. The main content area displays 'Active DHCP Client' with the following table:

IP Address	MAC Address	Time Expired (Sec)
192.168.2.100	80:1f:02:XX:XX:XX	55
192.168.2.101	d4:5d:64:XX:XX:XX	40

Below the table is a 'Refresh' button.


C. Access the setting page on your Edimax AP

1. Enter your Edimax AP's IP address into the URL bar on your web browser to access the setting page of the device. (e.g., Edimax AP's setting page, <http://192.168.2.100>)

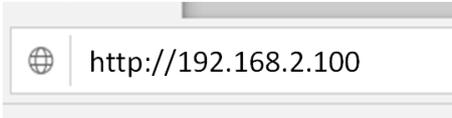

2. When your AP prompts you for a username and a password, enter both of them as below. Then, click **OK** to access the setting page.

- Username: **admin**
- Password: **1234**

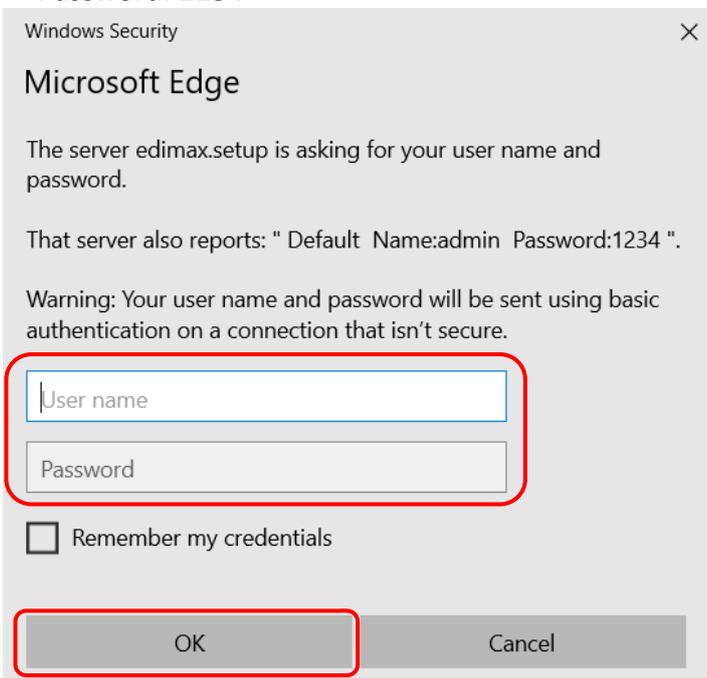

3. This is the setting page of your Edimax AP. Now it is ready for you to configure the settings.

